


# Butterfly valve AT 2342-

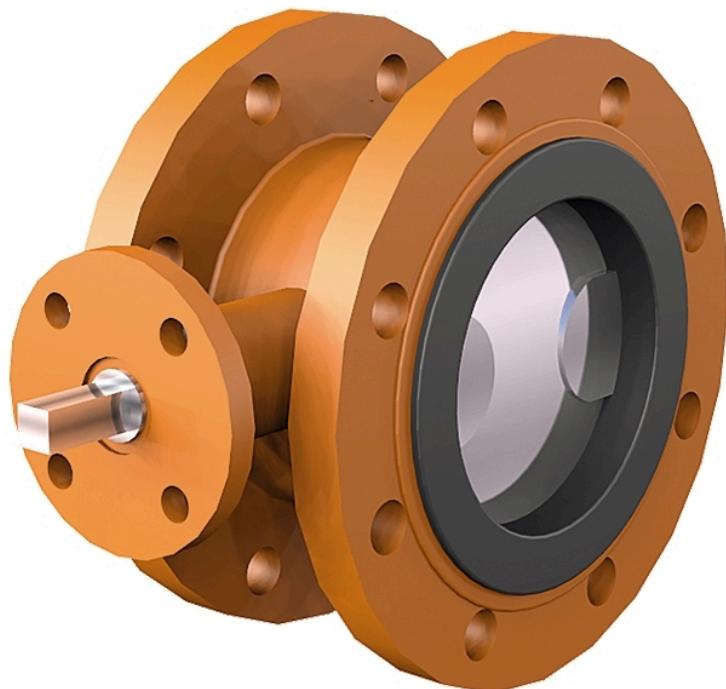

# Product information

Eurovalve fully-sealing rotary valve, flanged design with NBR rubber lining vulcanized in the housing, also suitable for vacuum and as an end valve against the valve's entire PN, with a hand lever or worm gear.

Dimension range (DN)	50 - 2000
PN	10 - 16
Temperature (°C)	0 - 90
Main material	Ductile iron

## Area of use

For the shut-off and regulation of hot and cold water, as well as air and other neutral gases. For example, tap water, wastewater, seawater, oils, and glycol mixtures, see also "Selection of damper valves". NBR lining: 0°C to +90°C. Hydrocarbon compounds with a maximum of 30% aromatics at +20°C, water, powder, air, and neutral gases. EPDM lining: -20°C to +110°C. Tap water, certain alcohols (maximum 30%), certain diluted inorganic acids.

## Tender text

### PSB.2 Rotary butterfly valves

Butterfly valve AT 2342 with a cast iron body and a NBR lining vulcanized into the body, as well as a duplex stainless steel disc. With flanges (standard PN16 DN50-200, PN10 DN250-1000), suitable as an end valve against full working pressure. AT 234xS with lever as standard up to DN150 and gearbox as standard from DN200.

## Quality assurance

AFS 2023:5, PED 2014/68/EU

### The product is CE marked

Testing is carried out according to SS-ISO 5208 edition 2, leakage class A applies to the valve type.

Certificate SS-EN 10204, 2.2 and by most classification societies can be provided.

Certificate SS-EN 10204, 3.1 can be provided upon special request.

The desired type of certificate is specified when ordering.

Suitable as an end valve with or without blind flange against full working pressure.

**Product marking:** Brand, DN, PN, material

## Measurements and weight

**Dimension range (DN):** 50 - 2000

## Function and design

Fully sealed maintenance-free butterfly valve with a centrally located disc, split spindle, and a completely housed body with in-house vulcanized rubber lining that eliminates the risk of gap corrosion, protects the valve body internally against corrosion, and serves as a flange gasket. The manufacturing process ensures excellent sealing and increased lifespan as wear of the lining is eliminated. The profile of the disc is crucial to achieving good flow characteristics, which ultimately leads to minimizing energy losses. The valve is tight regardless of flow direction.

Suitable as an end valve with or without blind flange against full working pressure.

The disc and shaft pins are connected with one or more strong tapered pins.

Construction length according to SS-EN 558, series 13 short

Top flange according to ISO 5211.

Standard surface treatment class C3 according to ISO 12944.

For outdoor installation without rain protection, surface treatment class C4 is recommended.

## Technical data

**Main material:** Ductile iron

**Main material code:** Ductile iron GJS-400-15 (GGG40)

**Included materials:** Stainless steel, Rubber, Ductile iron

**Included material code:** Stainless steel duplex (1.4462), Ductile iron GJS-400-15 (GGG40), NBR (nitrile butadiene rubber)

**Temperature (°C):** 0 - 90

**PN:** 10 - 16

**Connection:** Flanged EN1092

**ETIM classification:** EC010910 - Butterfly valve

**BK04 code:** 20706 Single-leaf dampers

**Product colour:** RAL 2000 - Yellow orange

## Installation and maintenance

**Flowdirection:** Bi-directional

**Possible mounting position:** Vertical, Horizontal

**Possible mounting position notes:** "Mounting with a horizontal spindle axis is optimal."

The valve is intended to be mounted between flanges, without gaskets, and where possible with the shafts in a horizontal position. The valve should be operated regularly to avoid the accumulation of dirt that can lead to leakage.

The company's management system  
is certified by DNV  
ISO 9001 • ISO 14001

# Get into the flow

**Get into the flow with Armatec.**



**armatec**

info@armatec.se | +46 31 89 01 00 | www.armatec.se