


**DN8**

Item	Qty	Part Number	Description	Material	Treatment
1	1	24399	PIPE-DN8 TWIST-ACB	TUBE TWIST ACB-8.4x12.8-GREY-5x0.30 PET	-
2	1	24445	SLEEVE-DN8	Stainless Steel AISI 304	-
3	1	24446	SLEEVE-DN8-BLANK	Stainless Steel AISI 304	-
4	1	24464	NIPPLE-G1/2" Mltr.L13 DN8-DZR	Brass CW626N	-
5	1	24466.3	ELBOW-G1/2" Mltr.L13 DN8-DZR	Brass CW626N	Nickel-Plated
6	2	23432.3	NUT-G1/2"-H11-SW22.3	Brass CW617N	Light blasting + Nickel-Plated
7	2	11823	JGP-10.5X18X2-1/2	EPDM	-
8	1	22012	NEUTRAL LABEL	Polypropylene (>PP<)	-

Part Number	Description	Hose length	ARMATEC Reference	ARMATEC Description
212139	TWIST-ACB-CODO-HG-1212-800-ARMATEC	810 +/-10	5745AKF8800121209	Slang AKF DN8 800 inv 1/2" x 90° inv 1/2"
212140	TWIST-ACB-CODO-HG-1212-1200-ARMATEC	1215 +/-15	5745AKF81200121209	Slang AKF DN8 1200 inv 1/2" x 90° inv 1/2"
212141	TWIST-ACB-CODO-HG-1212-1500-ARMATEC	1520 +/-20	5745AKF81500121209	Slang AKF DN8 1500 inv 1/2" x 90° inv 1/2"
212142	TWIST-ACB-CODO-HG-1212-2000-ARMATEC	2030 +/-30	5745AKF82000121209	Slang AKF DN8 2000 inv 1/2" x 90° inv 1/2"
212143	TWIST-ACB-CODO-HG-1212-3000-ARMATEC	3050 +/-50	5745AKF83000121209	Slang AKF DN8 3000 inv 1/2" x 90° inv 1/2"

**General Notes:**

- All dimensions are in mm.
- Product marking according to Tucai Engineering Standard ET-050.
- Pressing parameters according to Tucai Engineering Standard ET-035.
- Width across flat surfaces according to DIN 475-1.
- General and geometrical tolerances according to ISO 2768-mK.
- Surface texture according to ISO 1302.
- Hose length not to scale.
- Packaging specific for client - No mention of Tucai in packaging.
- Working Parameters:
  - Minimum operating temperature: -20°C
  - Maximum operating temperature: 90°C
  - Maximum operating pressure: 10 bar

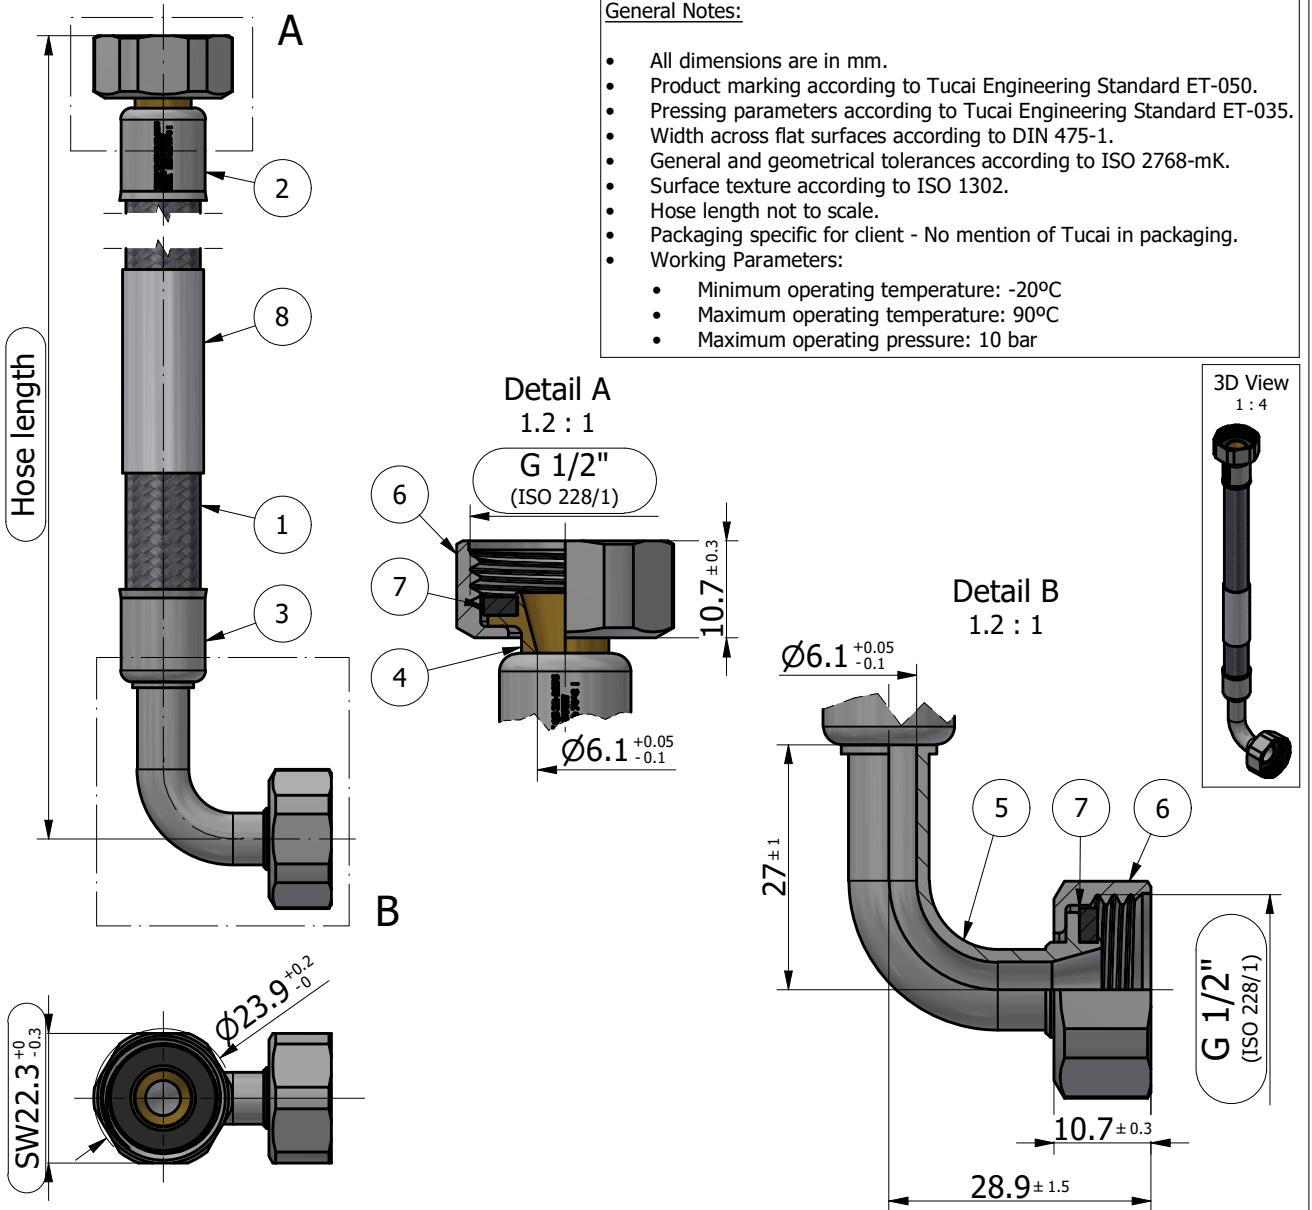

INSPECTION DIMENSION

Hose length

C

BRASS MATERIAL SHALL BE STRESS RELIEVED

a	25/11/2024	Initial release.	9775	GRG	DDO
REV	DATE	DESCRIPTION	PET	DESIGNER	CHECKED BY

DESIGNER	GRG	25/11/2024
APPROVED BY	DDO	25/11/2024

**HOSE ASSEMBLY**

TWIST-ACB-CODO-HG-1212-ARMATEC

Code  
**212139-T**

Code Prot.: -