

Knife Gate Valve AT 2206-



Product information

Shut-off valve for media with high fiber content or solid particles. With rising or non-rising spindle.

| | |
|-----------------------------|-----------------|
| Dimension range (DN) | 80 - 1200 |
| PN | 6 - 10 |
| Temperature (°C) | 0 - 250 |
| Main material | Stainless steel |

Area of use

Shut-off valve for media with high fiber content or solid particles.

- Pulp
- Pellets
- Sludge
- Recycled paper
- Powder
- Slurry
- Backwater
- Wastewater

Tender text

PSB.3 Sliding gate valves

Quality assurance

AFS 2023:5, 8 paragraf, PED 2014/68/EU art 4.3

The product is CE marked

Product marking: Brand, DN, PN, material, flow direction, and seat marking.


Energy and environment declaration

Reach date: 3/3/2026 8:08:00 AM

Reach note: The product is not covered by REACH

List of details


| Pos | Component | Material |
|-----|-----------|--|
| 1 | Body | Stainless steel GX5CrNi19-10 (1.4308) |
| 2 | Gate | Acid resistant stainless steel AISI 316 (1.4401) |
| 3 | Seat | PTFE (polytetrafluoroethylene) |
| 4 | Packing | PTFE (polytetrafluoroethylene) |

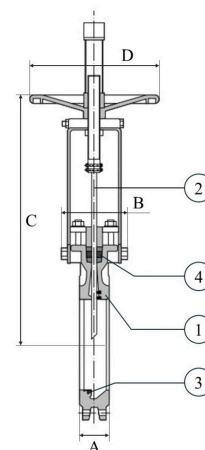

Measurements and weight

Dimension range (DN): 80 - 1200

| DN | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|------|
| A | 50 | 50 | 50 | 60 | 60 | 70 | 70 | 96 | 100 |
| B | 92 | 92 | 102 | 102 | 119 | 119 | 119 | 290 | 290 |
| C | 333 | 373 | 406 | 458 | 578 | 679 | 779 | 906 | 1012 |
| D | 225 | 225 | 225 | 225 | 325 | 325 | 380 | 450 | 450 |
| Net weight (kg) | 9 | 11 | 13 | 17 | 29 | 40 | 53 | 93 | 126 |

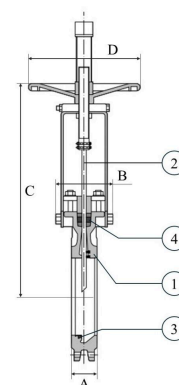

Function and design

Shut-off valve with handwheel, rising spindle. Full bore provides low pressure drop and minimizes the risk of clogging. Homogeneously cast valve body eliminates leakage to the atmosphere and prevents skewing of the damper. Tight packing box through gland design with PTFE-impregnated braid and extra O-ring. In-house cast guide blocks increase the blade's pressure against the soft seal when closed. Replaceable soft seal and packing box seal.

Technical data

Main material: Stainless steel

Main material code: Stainless steel GX5CrNi19-10 (1.4308)

Included materials: Stainless steel, Other

Included material code: Stainless steel GX5CrNi19-10 (1.4308), Acid resistant stainless steel AISI 316 (1.4401), PTFE (polytetrafluoroethylene)

Temperature (°C): 0 - 250

PN: 6 - 10

Connection: Flanged EN1092

ETIM classification: EC011462 - Knife gate valve

BK04 code: 20709 Slide damper valves

Product colour: RAL 5015 - Sky blue

ProductColourAndColourNote: RAL 5015 - Sky blue.

| DN | 80 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 |
|-----|-----|-----|------|------|------|------|------|-------|-------|
| KVS | 496 | 910 | 1620 | 2110 | 3845 | 5400 | 8150 | 10790 | 14180 |

Installation and maintenance

Flowdirection: Uni-directional

Possible mounting position: Vertical

"Mounted between flanges."

The company's management system
is certified by DNV
ISO 9001 • ISO 14001

Get into the flow

Get into the flow with Armatec.



armatec

info@armatec.se | +46 31 89 01 00 | www.armatec.se