


# Ball valve AT 3711-UK



## Product information

High neck, full flow, external thread, and steel handle. Viridi ball valve in dezincification-resistant lead-free brass (less than 0.1% lead). Shut-off valve for hot and cold tap water. Can also be used in cooling systems and for air, non-flammable gases, and lighter oils (such as diesel), see also section "Installation". Silicone-free. AT 3711UK is intended to be assembled with solder or press ends. Also suitable as a replacement valve according to SS 1129/SMS 3269.

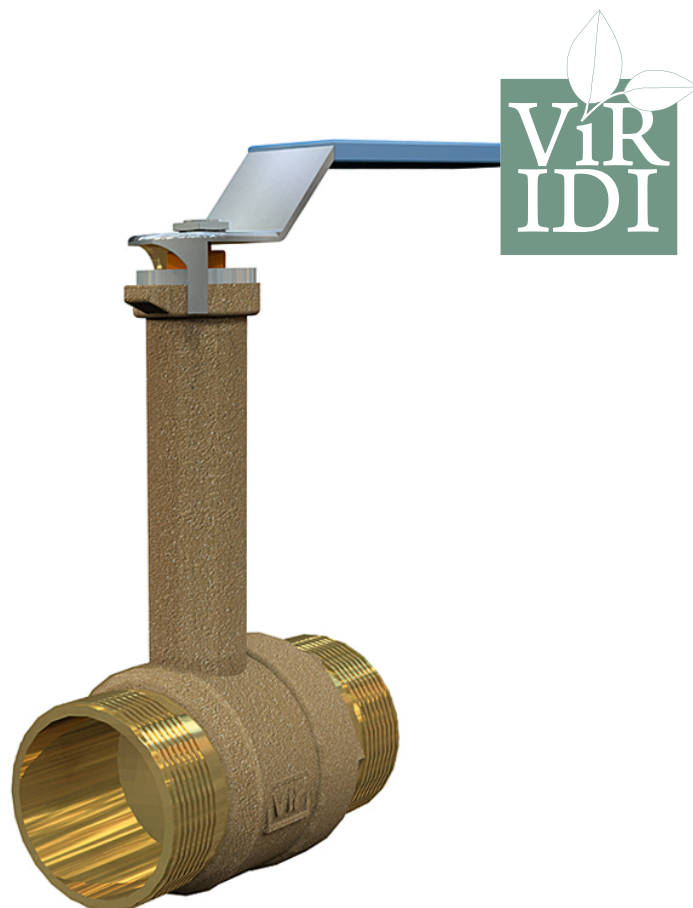

<b>Dimension range (DN)</b>	10 - 50
<b>Temperature (°C)</b>	0 - 150
<b>Main material</b>	Brass

### Area of use

Viridi shut-off valve for hot and cold tap water. It can also be used in heating systems, cooling systems, and for air, non-flammable gases, and lighter oils (such as diesel), see also section "Installation". Silicone-free. AT 3711UK is intended to be assembled with solder or press ends. Also as a replacement valve according to SS 1129/SMS 3269. PN40 for ≤DN50 (Max 40bar empty +95°C, max 25bar at +150°C) PN25 for ≥DN65 (Max 25bar empty +95°C, max 16bar at +150°C) Suitable for water from 0°C to 150°C. Suitable for air from -10°C to 150°C. Can be used down to -30°C in cooling systems with glycol-blended media.

### Tender text

#### PSB.1 Ball valves

Viridi ball valve AT 3711UK in dezincification-resistant lead-free brass (lead content below 0.1%). With full flow, cast high spindle neck, and steel handle. PN 16. Graphite packing and teflonized ball. Viridi ball valve AT 3711UK is approved for installation where requirements from the Building Assessment and Healthy House have been set.

### Quality assurance

AFS 2023:5, 8 paragraf

The Viridivent valves may be used for liquids and gases in group 2 according to AFS 2016:1. The Viridivent valves are covered by AFS 2016:1, 8§, the directive for pressure equipment (PED 3.3) and therefore may not be CE marked. The Viridi range is made of alloys that are covered by the "4MS Common Composition List" which includes materials and products approved for use in contact with drinking water.

**Product marking:** Brand, PN and DN.

## Energy and environment declaration

**Product Bvb:** Avoided

**Product BVB ID:** 50195


**Subject to notification under REACH:** No

**Reach date:** 08/04/2026

## Measurements and weight

Dimension range (DN): 10 - 50

DN	10	15	20	25	32	40	50
A	50	55	60	70	80	90	100
B	96	98	102	112	117	132	140
C	91.5	91.5	91.5	126.5	126.5	160	160
D	6	6	6	8	8	10	10
E	7	7	7	9	9	11	11
Net weight (kg)	0.234	0.295	0.398	0.641	0.925	1.602	2.381



## Function and design

AT 3711UK has a high spindle neck. Suitable for installation where the valve needs to be over-insulated. AT 3711UK DN 40 and DN 50 are equipped with a regular handle, if a slow-closing handle is desired, choose AT 3711UK40V or AT 3711UK50V. Viridi valves have full flow.

## Technical data

**Main material:** Brass

**Main material code:** Brass (CuZn38As) (CW511L, Pb<0,1%)

**Included materials:** Brass, Steel, Other

**Included material code:** Brass (CuZn38As) (CW511L, Pb<0,1%), PTFE (polytetrafluoroethylene)

**Temperature (°C):** 0 - 150

**Temperature notes:** PN40 for ≤DN50 (Max 40bar up to +95°C, max 25bar at +150°C) PN25 for ≥DN65 (Max 25bar up to +95°C, max 16bar at +150°C). Suitable for water from 0°C to 150°C. Suitable for air from -10°C to 150°C. Can be used down to -30°C in cooling systems with glycol-based media.

**Connection:** External M-thread (ISO 68-1)

**ETIM classification:** EC011343 - Ball valve

**BK04 code:** 20702 Ball valves

**Comment to colour:** Natural colour, untreated.

Item number	KVS	Connection 1	Connection 1 - spec.	Connection 2	Connection 2 - spec.
3711UK10	5.8	External M-thread (ISO 68-1)	M22	External M-thread (ISO 68-1)	M22
3711UK15	15.7	External M-thread (ISO 68-1)	M26	External M-thread (ISO 68-1)	M26

Item number	KVS	Connection 1	Connection 1 - spec.	Connection 2	Connection 2 - spec.
3711UK20	30.8	External M-thread (ISO 68-1)	M34	External M-thread (ISO 68-1)	M34
3711UK25	49.3	External M-thread (ISO 68-1)	M40	External M-thread (ISO 68-1)	M40
3711UK32	79	External M-thread (ISO 68-1)	M50	External M-thread (ISO 68-1)	M50
3711UK40	125.3	External M-thread (ISO 68-1)	M55	External M-thread (ISO 68-1)	M55
3711UK50	224.2	External M-thread (ISO 68-1)	M70	External M-thread (ISO 68-1)	M70

## Installation and maintenance

**Flowdirection:** Bi-directional

**Possible mounting position:** Vertical, Horizontal

The grooves and sealing surfaces on the valve should be lubricated with paste to facilitate assembly. Never clamp the valve body with a pipe wrench or vice. Always use existing counterforce when fixing the valve. Retightening of the packing may be necessary for air and gas systems when the pressure exceeds 6 bar. For optimal function, the valve should be operated at least 2 times per year.

The company's management system  
is certified by DNV  
ISO 9001 • ISO 14001

# Get into the flow

Get into the flow with Armatec.



**armatec**

info@armatec.se | +46 31 89 01 00 | www.armatec.se