

Particle separator AT 8040-



reflex

Product information

Steel particle separator with particle separator and magnetic insert. Optional AT 8040MI.



| | |
|-----------------------------|----------|
| Dimension range (DN) | 50 - 300 |
| PN | 10 |
| Temperature (°C) | 0 - 110 |
| Main material | Steel |

Area of use

Exdirt D, for effective separation of magnetic, non-magnetic particles and sludge in heating and cooling systems where the fluid is water. It can also be installed in systems with mixtures of water/glycols, but with a maximum concentration of 50%. Not suitable for systems with mixtures of water/salts.

By applying a particle separator in the system, sludge and particles with a size down to 5 micrometers (>5micron) are separated, reducing the risk of flow disturbances and circulation problems. It contributes to increased operational reliability under difficult operating conditions and reduces the need for maintenance.

Tender text

PMB.222 Sludge separators

Particle separator AT 8040-... made of steel with magnetic insert, PN10, with particle separator and large collection chamber that can be easily drained through a ball valve. Alternatively, it can be equipped with a cleaning hatch for easy maintenance.

Quality assurance

AFS 2023:5, PED 2014/68/EU

Should not be CE-marked.

Product marking: Marked with dimensions, maximum operating pressure, type number, and manufacturer's name.

Energy and environment declaration


Product Bvb: Avoided

Product BVB ID: 110737

Reach date: 4/13/2026 4:26:00 PM

List of details

| Pos | Component | Material |
|-----|-----------|----------|
|-----|-----------|----------|

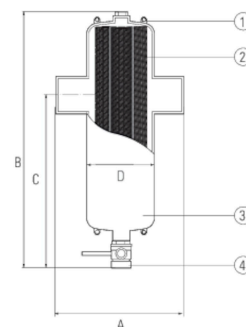

Measurements and weight

Dimension range (DN): 50 - 300

| DN | A | B | C | D | Net weight (kg) |
|-----|-----|------|-----|-----|-----------------|
| 50 | 260 | 521 | 370 | 132 | 3 |
| 65 | 260 | 521 | 370 | 132 | 3 |
| 80 | 370 | 636 | 370 | 206 | 9 |
| 100 | 370 | 636 | 370 | 206 | 9 |
| 125 | 525 | 811 | 430 | 354 | 22 |
| 150 | 525 | 811 | 430 | 354 | 24 |
| 200 | 650 | 1021 | 430 | 409 | 44 |
| 250 | 750 | 1324 | 500 | 480 | 70 |
| 300 | 850 | 1535 | 500 | 634 | 112 |

Function and design

Particle separator Exdirt effectively removes sludge and particles in heating and cooling systems that are transported with the system fluid. To effectively separate these from the fluid, the separation housing is large in relation to the connection dimension. When the fluid passes through the separator's housing, the flow rate is reduced. This reduces the velocity through the separation housing, allowing dirt and particles to be optimally separated as they pass through a special wire mesh. This allows dirt and particles to be separated from the fluid, fall downwards, and collect at the bottom of the housing. With the help of the magnetic insert, even magnetic particles are "captured" in the separator.

As an alternative, the separator can be chosen with a cleaning/inspection hatch. Where the large separation housing is equipped with a flanged cleaning hatch for easy maintenance and inspection. (8040R)

Exdirt separates sludge and particles with minimal pressure drop during continuous operation. Accumulated dirt is

deposited on the bottom of the separator and easily emptied by opening the drain valve to release the particles into, for example, a collection bucket without disrupting the system's operation. The sludge accumulation chamber has a large capacity, providing long intervals between flushes.

Technical data

Main material: Steel

Included materials: Steel


Temperature (°C): 0 - 110

PN: 10

Connection: ISO 1127, weld end

ETIM classification: EC010260 - Air-/dirt separator for central heating/cooling system

Product colour: RAL 7040 - Window grey

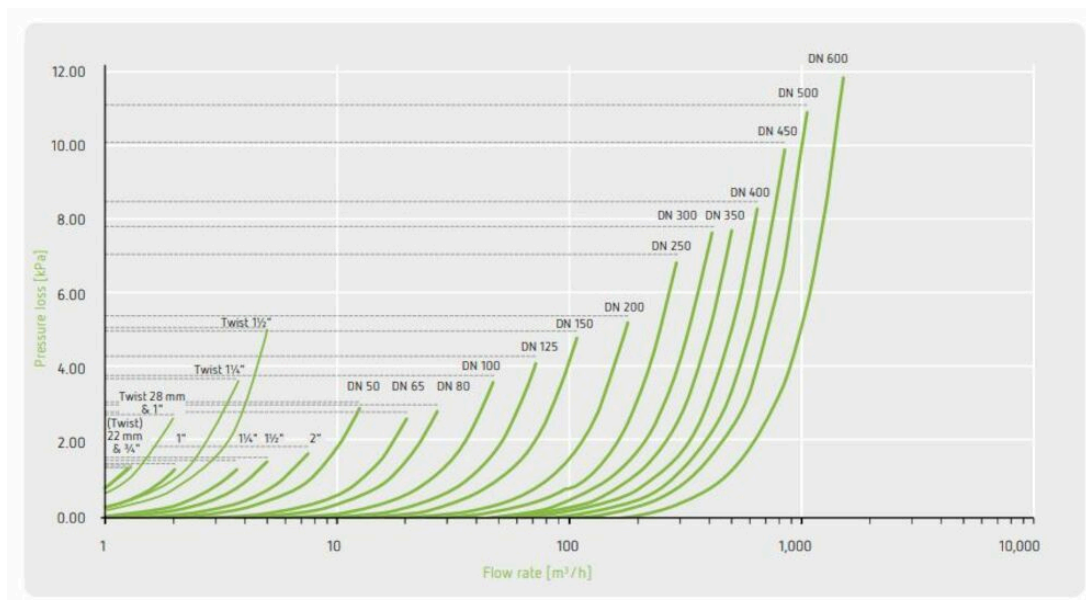

| Item number | Max system flow (m ³ /h) | Execution | Connection 1 | Connection 1 - spec. | Connection 2 | Connection 2 - spec. |
|-------------|-------------------------------------|---------------------|--------------------|----------------------|--------------------|----------------------|
| 8040-50 | 12.5 | Particle separation | ISO 1127, weld end | DN50-Dy 60,3mm | ISO 1127, weld end | DN50-Dy 60,3mm |
| 8040-65 | 20 | Particle separation | ISO 1127, weld end | DN65-Dy 76,1mm | ISO 1127, weld end | DN65-Dy 76,1mm |
| 8040-80 | 27 | Particle separation | ISO 1127, weld end | DN80-Dy 88,9mm | ISO 1127, weld end | DN80-Dy 88,9mm |
| 8040-100 | 47 | Particle separation | ISO 1127, weld end | DN100-Dy 114,3mm | ISO 1127, weld end | DN100-Dy 114,3mm |
| 8040-125 | 72 | Particle separation | ISO 1127, weld end | DN125-Dy 139,7mm | ISO 1127, weld end | DN125-Dy 139,7mm |

| Item number | Max system flow (m ³ /h) | Execution | Connection 1 | Connection 1 - spec. | Connection 2 | Connection 2 - spec. |
|-------------|-------------------------------------|---------------------|--------------------|----------------------|--------------------|----------------------|
| 8040-150 | 108 | Particle separation | ISO 1127, weld end | DN150-Dy 168,3mm | ISO 1127, weld end | DN150-Dy 168,3mm |
| 8040-200 | 180 | Particle separation | ISO 1127, weld end | DN200-Dy 219,1mm | ISO 1127, weld end | DN200-Dy 219,1mm |
| 8040-250 | 288 | Particle separation | ISO 1127, weld end | DN250-Dy 273mm | ISO 1127, weld end | DN250-Dy 273mm |
| 8040-300 | 405 | Particle separation | ISO 1127, weld end | DN300-Dy 323,9mm | ISO 1127, weld end | DN300-Dy 323,9mm |

Installation and maintenance

Possible mounting position: Horizontal

A particle separator is installed on the return line in heating and cooling systems before important components such as heat exchangers, boilers, and cooling coils. It prevents sludge and particles from being transported with the liquid and settling in system components. The particle separator should be regularly checked and cleaned as needed.

The company's management system
is certified by DNV
ISO 9001 • ISO 14001

Get into the flow

Get into the flow with Armatec.



armatec

info@armatec.se | +46 31 89 01 00 | www.armatec.se