



Product information

Shut-off valve for media with high fiber content or solid particles. With rising or non-rising spindle.

Dimension range (DN)	50 - 1200
PN	6 - 10
Temperature (°C)	0 - 120
Main material	Cast iron

Area of use

Shut-off valve for media with high fiber content or solid particles. - Pulp - Pellets - Sludge - Recycled paper - Powder - Slurry - Backwater - Wastewater.

Tender text

PSB.3 Sliding gate valves

Quality assurance

AFS 2023:5, 8 paragraf, PED 2014/68/EU

Product marking: Brand, DN, PN, material, flow direction, and seat marking.


Energy and environment declaration

Reach date: 12/3/2024 1:00:08 PM

Reach note: The product is not covered by REACH

List of details


Pos	Component	Material
1	Body	Cast iron GJL-250 (GG25)
2	Gate	Acid resistant stainless steel AISI 316 (1.4401)
3	Seat	EPDM (ethylene propylene diene monomer rubber)
4	Packing	PTFE (polytetrafluoroethylene)

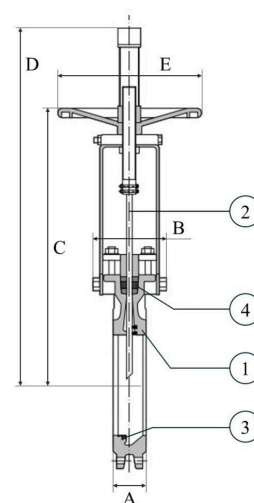

Measurements and weight

Dimension range (DN): 50 - 1200

DN	100	150	250
A	50	60	70
B	92	102	119
C	373	458	679
D	502	644	1016
E	225	225	325
Net weight (kg)	40	17	40

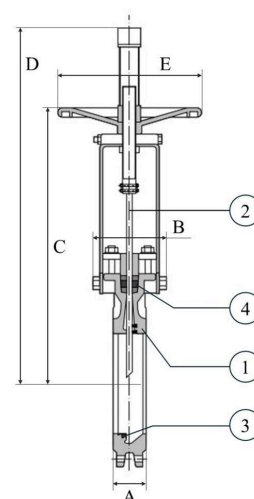

Function and design

Shut-off valve with handwheel, rising spindle. Full bore provides low pressure drop and minimizes the risk of clogging. Homogeneously cast valve body eliminates leakage to the atmosphere and prevents skewing of the damper. Tight packing box through gland design with PTFE-impregnated braid and extra O-ring. In-house cast guide blocks increase the blade's pressure against the soft seal when closed. Replaceable soft seal and packing box seal.

Technical data

Main material: Cast iron

Main material code: Cast iron GJL-250 (GG25)

Included materials: Cast iron, Stainless steel, Rubber, Other

Included material code: Acid resistant stainless steel AISI 316 (1.4401), Cast iron GJL-250 (GG25), EPDM (ethylene propylene diene monomer rubber), PTFE (polytetrafluoroethylene)

Temperature (°C): 0 - 120

PN: 6 - 10
Connection: Flanged EN1092
ETIM classification: EC011462 - Knife gate valve
BK04 code: 20709 Slide damper valves
Product colour: RAL 5015 - Sky blue

DN	100	150	250
KVS	910	2110	5400

Installation and maintenance

Flowdirection: Uni-directional
Possible mounting position: Vertical
"Mounted between flanges."

Please feel free to contact us

We answer your questions by e-mail and telephone. No question is too small, no challenge is too big. You are always welcome at Armatec.

info@armatec.se | +46 31 89 01 00 | www.armatec.se

THE COMPANY'S MANAGEMENT SYSTEM
IS CERTIFIED BY DNV
ISO 9001 • ISO 14001