



resideo

Product information

Stainless steel protective module type BA. Threaded connection for liquid category 4 according to SS-EN 1717. Integrated filter, compact design.

| | |
|----------------------|-----------------|
| Dimension range (DN) | 15 - 50 |
| PN | 10 |
| Temperature (°C) | 0 - 65 |
| Main material | Stainless steel |



Area of use

Backflow preventers are used to protect internal and external plumbing systems from backflow and pressure surges. The protective covering can handle liquids up to category 4. The backflow preventer is of type BA in accordance with SS-EN 1717. AT 1168B and 1168R have integrated filters and are therefore highly suitable for compact installations.

Tender text

PSG.260 Composite backflow prevention devices

Backflow prevention device AT 1168-...SS DN..., Complete protection module consisting of protection device type BA with double check valves and intermediate pressure-controlled chamber with drainage, integrated filter, inlet and outlet valves. PN10 in threaded design. For maximum protection coverage of liquid category 4 according to SS-EN 1717.

Quality assurance

Fluid category 4, SS-EN 1717

Product marking: Manufacturer, DN, PN, flow direction, manufacturer and manufacturing number.
Separate inspection nameplate.


Energy and environment declaration

Product Bvb: Accepted

Product BVB ID: 124905

Reach date: 6/14/2023 12:00:00 AM

| Pos | Component | Material |
|-----|-----------|----------|
|-----|-----------|----------|

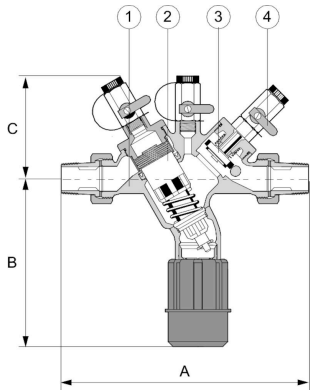

Measurements and weight

Dimension range (DN): 15 - 50

| DN | A | B | C | Net weight (kg) |
|----|-----|-----|-----|-----------------|
| 15 | 225 | 140 | 110 | 1.6 |
| 20 | 225 | 140 | 110 | 1.6 |
| 25 | 225 | 140 | 110 | 1.6 |
| 32 | 327 | 172 | 165 | 5 |
| 40 | 348 | 172 | 165 | 5 |
| 50 | 348 | 172 | 165 | 5 |

Function and design

Backflow preventer type BA covers the risks up to liquid category 4 when connecting tap water, i.e. "Liquid that poses a health risk due to the presence of one or more toxic or highly toxic substances or one or more radioactive, mutagenic or carcinogenic substances".

The protective device has double check valves and an intermediate chamber with drainage (the drainage valve is combined in an insert with the inlet check valve). The protective devices work with three different pressure zones. The pressure in zone 1 is higher than in zone 2, which is higher than in zone 3. A drainage valve is connected in zone 2 and opens when the pressure difference between zone 1 and zone 2 drops to 0.14 bar. The water in zone 2 is drained to the atmosphere. This prevents siphonage or overpressure backflow to the system.

The backflow preventer must be installed as a complete protection module. It is an absolute requirement that the backflow preventer is installed as a protection module.

Technical data

- Main material: Stainless steel
- Main material code: Acid resistant stainless steel AISI 316 (1.4408, CF8M)
- Included materials: Stainless steel
- Included material code: Acid resistant stainless steel AISI 316 (1.4408, CF8M)

Temperature (°C): 0 - 65

PN: 10

ETIM classification: EC004501 - Backflow preventer

Pressure drop characteristics

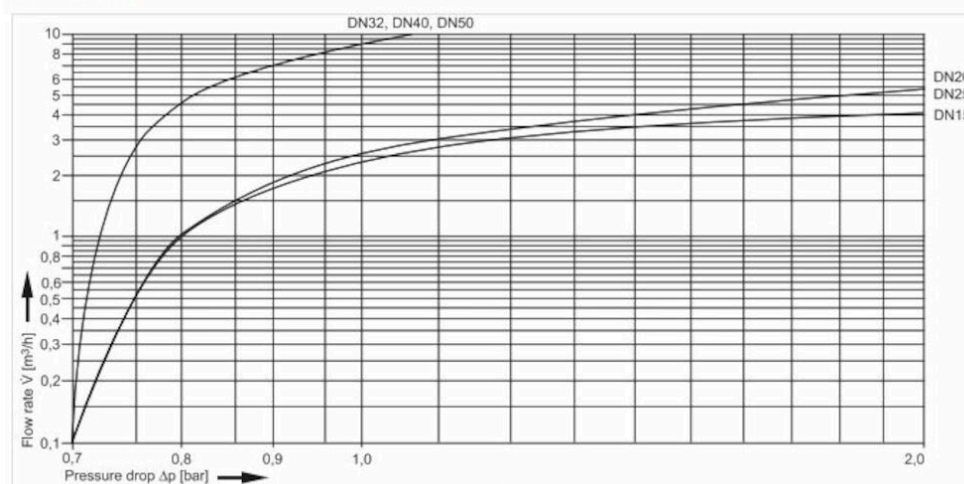


Fig. 1 Pressure drop within the valve in dependency of the flow rate and the used connection size

Installation and maintenance

Flowdirection: Uni-directional

Possible mounting position: Horizontal

Possible mounting position notes: "Shall be installed with drainage downwards."

For a complete protection module, supplement with 2 ball valves. See user manual.

Please feel free to contact us

We answer your questions by e-mail and telephone. No question is too small, no challenge is too big. You are always welcome at Armatec.

info@armatec.se | +46 31 89 01 00 | www.armatec.se

THE COMPANY'S MANAGEMENT SYSTEM
IS CERTIFIED BY DNV
ISO 9001 • ISO 14001