



Product information

Shut-off valve for media with high fiber content or solid particles. With rising or non-rising spindle.

Dimension range (DN)	50 - 1200
PN	6 - 10
Temperature (°C)	0 - 120
Main material	Stainless steel

## Area of use

Shut-off valve for media with high fiber content or solid particles.

- Pulp
- Pellets
- Sludge
- Recycled paper
- Powder
- Slurry
- Backwater
- Wastewater

## Tender text

### **PSB.3 Sliding gate valves**

## Quality assurance

AFS 2023:5, 8 paragraf, PED 2014/68/EU

**The product is CE marked**

**Product marking:** Brand, DN, PN, material, flow direction, and seat marking.


## Energy and environment declaration

**Reach date:** 12/3/2024 1:00:09 PM

**Reach note:** The product is not covered by REACH

## List of details


Pos	Component	Material
1	Body	Stainless steel GX5CrNi19-10 (1.4308)
2	Gate	Acid resistant stainless steel AISI 316 (1.4401)
3	Seat	EPDM (ethylene propylene diene monomer rubber)
4	Packing	PTFE (polytetrafluoroethylene)

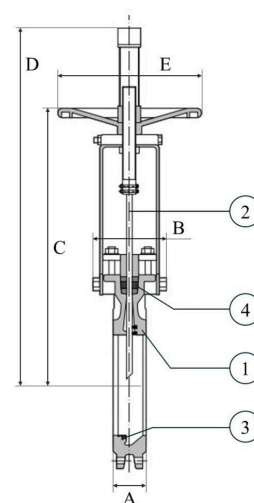

## Measurements and weight

**Dimension range (DN):** 50 - 1200

DN	80	100	150	200	250	350	400
A	50	50	60	60	70	70	100
B	92	92	102	119	119	119	290
C	333	373	458	578	679	679	1012
D	469	502	644	815	1016	1016	1442
E	225	225	225	325	325	325	450
Net weight (kg)	9	11	17	28	40	40	116

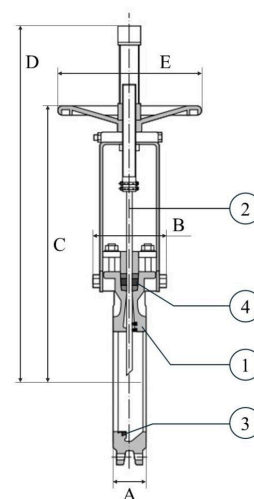

## Function and design

Shut-off valve with handwheel, rising spindle. Full bore provides low pressure drop and minimizes the risk of clogging. Homogeneously cast valve body eliminates leakage to the atmosphere and prevents skewing of the damper. Tight packing box through gland design with PTFE-impregnated braid and extra O-ring. In-house cast guide blocks increase the blade's pressure against the soft seal when closed. Replaceable soft seal and packing box seal.

## Technical data

**Main material:** Stainless steel

**Main material code:** Stainless steel GX5CrNi19-10 (1.4308)

**Included materials:** Stainless steel, Rubber, Other

**Included material code:** Stainless steel GX5CrNi19-10 (1.4308), Acid resistant stainless steel AISI 316 (1.4401), EPDM (ethylene propylene diene monomer rubber), PTFE (polytetrafluoroethylene)

**Temperature (°C):** 0 - 120

**PN:** 6 - 10  
**Connection:** Flanged EN1092  
**ETIM classification:** EC011462 - Knife gate valve  
**BK04 code:** 20709 Slide damper valves  
**Product colour:** RAL 5015 - Sky blue

DN	80	100	150	200	250	350	400
KVS	496	910	2110	3845	5400	10790	14180

Installation and maintenance

**Flowdirection:** Uni-directional  
**Possible mounting position:** Vertical  
"Mounted between flanges."

### Please feel free to contact us

We answer your questions by e-mail and telephone. No question is too small, no challenge is too big. You are always welcome at Armatec.

[info@armatec.se](mailto:info@armatec.se) | +46 31 89 01 00 | [www.armatec.se](http://www.armatec.se)

THE COMPANY'S MANAGEMENT SYSTEM  
IS CERTIFIED BY DNV  
ISO 9001 • ISO 14001