



Product information

Shut-off valve for media with high fiber content or solid particles. With rising or non-rising spindle.

Dimension range (DN)	50 - 1200
PN	6 - 10
Temperature (°C)	0 - 120
Main material	Cast iron

Area of use

Shut-off valve for media with high fiber content or solid particles.

- Pulp
- Pellets
- Sludge
- Recycled paper
- Powder
- Slurry
- Backwater
- Wastewater

Tender text

PSB.3 Sliding gate valves

Quality assurance

AFS 2023:5, 8 paragraf, PED 2014/68/EU

The product is CE marked

Product marking: Brand, DN, PN, material, flow direction, and seat marking.


Energy and environment declaration

Reach date: 12/3/2024 1:00:05 PM

Reach note: The product is not covered by REACH

List of details


Pos	Component	Material
1	Body	Cast iron GJL-250 (GG25)
2	Gate	Stainless steel AISI 304 (1.4301)
3	Seat	NBR (nitrile butadiene rubber)
4	Packing	PTFE (polytetrafluoroethylene)

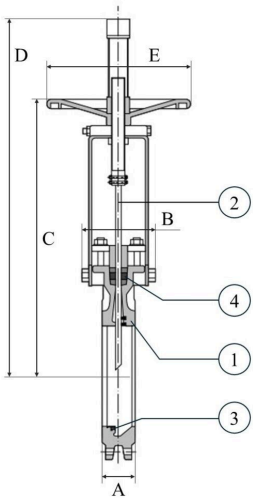

Measurements and weight

Dimension range (DN): 50 - 1200

DN	80	100	150	200
A	50	50	60	60
B	92	92	102	119
C	333	373	458	578
D	469	502	644	815
E	225	225	225	325
Net weight (kg)	9	11	17	28

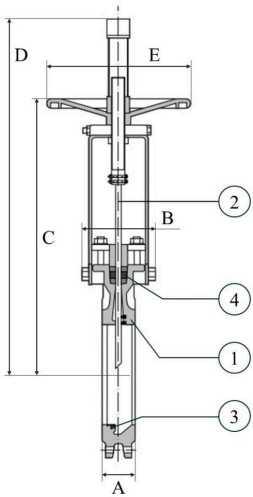

Function and design

Shut-off valve with handwheel, rising spindle. Full bore provides low pressure drop and minimizes the risk of clogging. Homogeneously cast valve body eliminates leakage to the atmosphere and prevents skewing of the damper. Tight packing box through gland design with PTFE-impregnated braid and extra O-ring. In-house cast guide lugs increase the blade's pressure against the soft seal when closed. Replaceable soft seal and packing box seal. Possible to automate with actuator.

Technical data

Main material: Cast iron

Main material code: Cast iron GJL-250 (GG25)

Included materials: Cast iron, Stainless steel, Rubber, Other

Included material code: Stainless steel AISI 304 (1.4301), Cast iron GJL-250 (GG25), NBR (nitrile butadiene rubber), PTFE (polytetrafluoroethylene)

Temperature (°C): 0 - 120

PN: 6 - 10
Connection: Flanged EN1092
ETIM classification: EC011462 - Knife gate valve
BK04 code: 20709 Slide damper valves
Product colour: RAL 5015 - Sky blue

DN	80	100	150	200
KVS	496	910	2110	3845

Installation and maintenance

Flowdirection: Uni-directional
Possible mounting position: Vertical
"Mounted between flanges."

Please feel free to contact us

We answer your questions by e-mail and telephone. No question is too small, no challenge is too big. You are always welcome at Armatec.

info@armatec.se | +46 31 89 01 00 | www.armatec.se

THE COMPANY'S MANAGEMENT SYSTEM
IS CERTIFIED BY DNV
ISO 9001 • ISO 14001