

Only to the extent expressly agreed by us this document may constitute a contractual obligation on our part



This document and its contents are the exclusive property of Alfa Laval AB and must not be copied, reproduced, transmitted or communicated to any other party or used for purposes not expressly permitted by us.

SÄRSKILDA KRAV
SPEC. REQUIREMENTS

Kanter brutna
Grader avlagsnade
Ytjämnhet Ra
Edges broken
Burrns removed
Surface roughn. in Ra

Toleranser där ej annat angetts. Avser spånavskilj, bearbetn., klippta eller stansade ytor.
Tolerances where not stated. Chip cutting, shearing or punching.

Basmått Basic size	Tol.
(1)	6 ± 0.2
(6)	30 ± 0.5
(30)	120 ± 0.8
(120)	315 ± 1.2
(315)	1000 ± 2
(1000)	2000 ± 3
(2000)	4000 ± 4

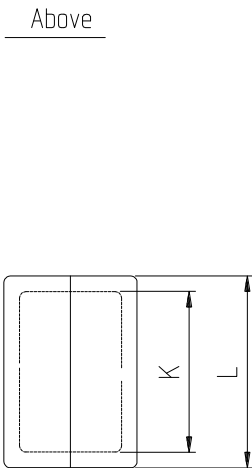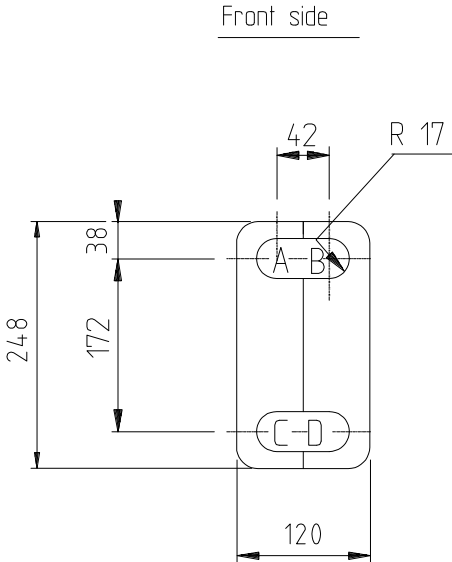

TYPE	K	L	ARTICLE NO.
CB14 / 0-14	41	81	34561197-01
CB14 / 20-40	102	142	34561197-02

TYPE	K	L	ARTICLE NO.
CB16 / 0-17	41	81	34561197-01
CB16 / 20-45	102	142	34561197-02



1.) NOTE
THERMAL CONDUCTIVITY: 0.035-0.039 W/mK

		34561197-XX		INSUL. BLACK		EPP		1.)	
Qty	Item	Article No.		Name/Designation		Material (final condition)/Blank			Note
	Assembly No.	Dept.	R&D	Date	130125	Scale	1:5	Title INSULATION EPP BLACK CB14, CB16 BHE	
		Drawn	AEK	Approved	AHN 130125	First angle projection ISO method E			
		DESIGN NOTIFICATION						Drawing No.	Rev. No.
		Project No.:						34561197	2
		Change Level: 2							
Text:									
Note added.									