
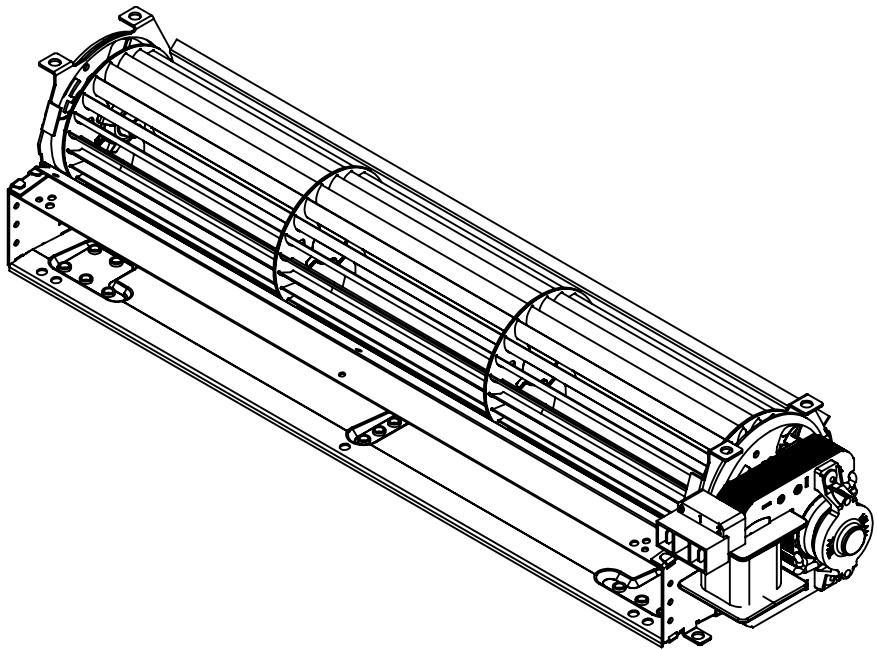
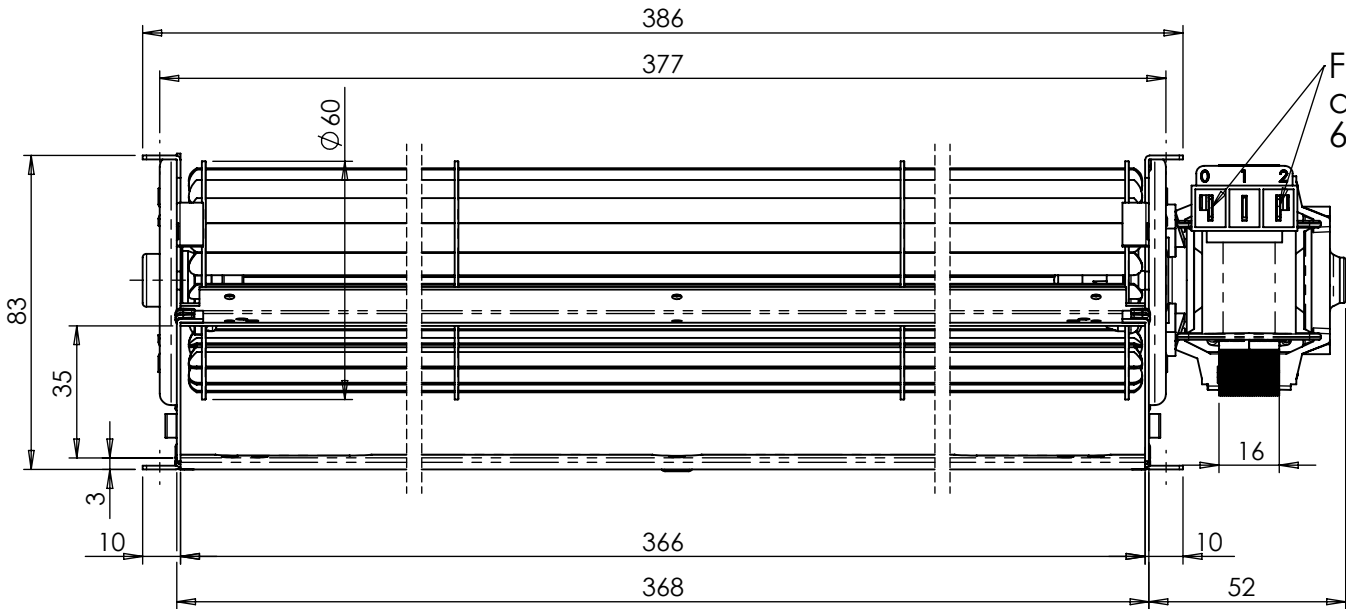
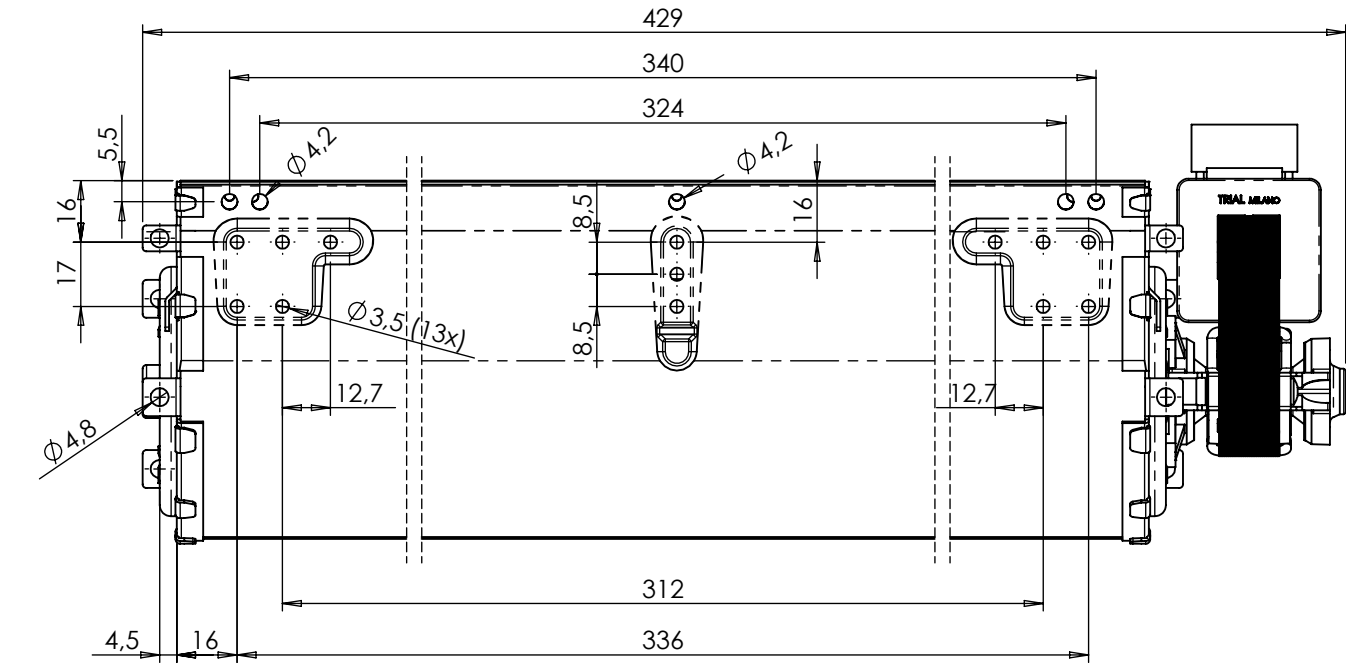



FOR APPROVAL

SIGN _____


Date _____

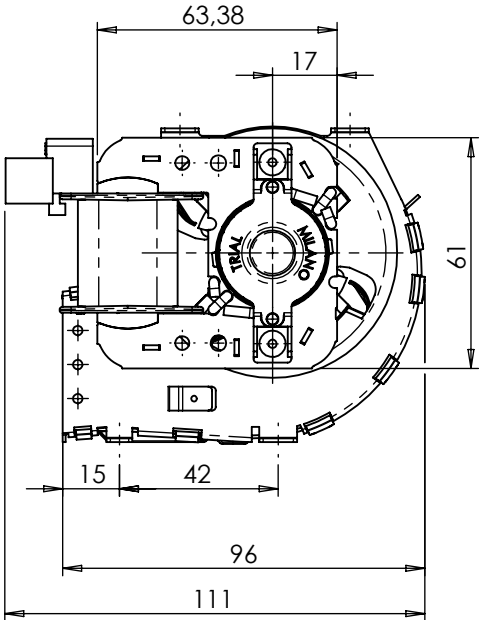

VISTA di "Riferimento"

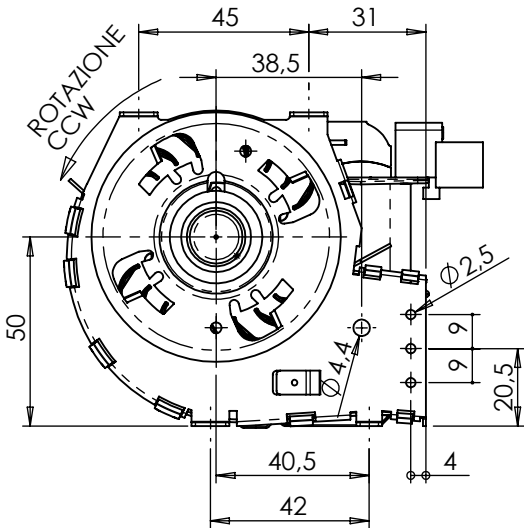

DATI CARATTERISTICI A 50HZ/TECHNICAL DATA AT 50HZ "TAS36B-080-00"			Mod.
Tensione nominale/Rated Voltage	V	230	
Frequenza/Rated Frequency	Hz	50-60	
Potenza assorbita/Input Power	W	31	
Classe isolamento/Insulation class (IEC 60085)		F	
Max temp./Max ambient temperature(IEC 60335-1)	°C	60	
N° di giri a vuoto/Rated speed no load	Rpm	1000	
Portata a bocca libera/Rated airflow	m³/h	210	
Pressione statica/Static pressure	Pa	48	
Rotazione/Rotation (side View)		CCW	
Funzionamento continuativo/Continuous duty			

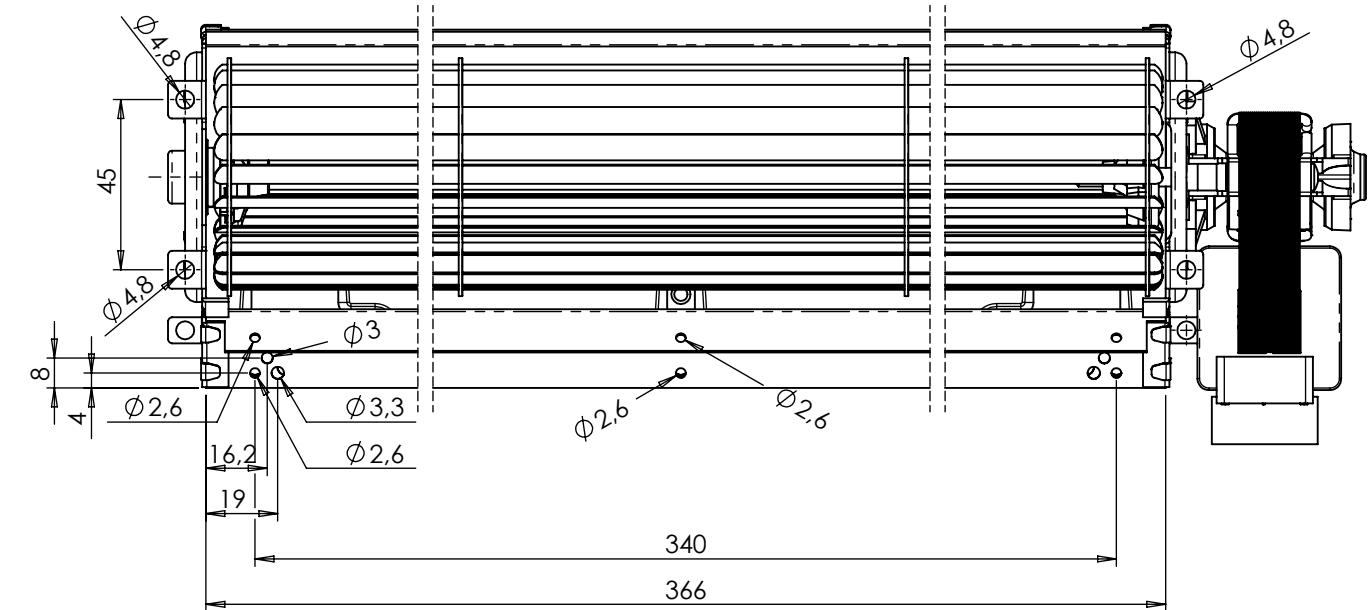

Materiale:		Peso netto [g]:	Trattamento:
TRIAL Srl S.Giuliano M.se Via dei Mille, 3 Tel (0039) 0298222231 Uff. Commerciale Tel (0039) 0298222351 Uff. Tecnico Fax (0039) 0298243291		Per le quote lineari ed angolari prive di tolleranza, riferirsi alla norma UNI ISO 2768 grado Medio.	
Descrizione: TFA003-D7-EC		230V50/60HZ	
RIF: NCA 60-360/31 12213631		Foglio 1 / 1	
		Dis. : Rizzi M. Data : 26/10/2015 Scala : 1:2 Visto : -	
		Codice TAS36B-080	
		Mod. 00	