

Air diverter AT 8060-



Product information

Automatic air separator with dirt protection mechanism.



Dimension range (DN)	10 - 15
PN	10
Temperature (°C)	0 - 180
Main material	Brass

Area of use

Exvoid T for automatic air separation of heating and cooling systems where the fluid is water or glycol. Can be mounted in systems with a mix of water/glycol, if control and oversight is increased. The valve should not be used in systems with a mix of water/salts. Separates effective microbubbles.

Tender text

PSF.1412 Automatic air deflectors.

Automatic air separator AT 8060-..., Exvoid T, brass, PN10, with a large air chamber and dirt protection mechanism. Provided with a shut-off valve AT 3640-...

Quality assurance

AFS 2023:5, PED 2014/68/EU

Fulfils AFS 1994:4 §8 standards and should not be CE-marked. All extractors are tightness tested.

Product marking: Exvoid T is marked with dimension, max. operation pressure, type number and manufacturer's name.


Energy and environment declaration

SundaHus: C-

Subject to notification under REACH

Item number	SCIP number
8060-10	8894d6b8-7bae-4950-b745-14a80be0e50f
8060H10	8894d6b8-7bae-4950-b745-14a80be0e50f
8060H15	8894d6b8-7bae-4950-b745-14a80be0e50f
8060-15	8894d6b8-7bae-4950-b745-14a80be0e50f

Pos	Component	Material

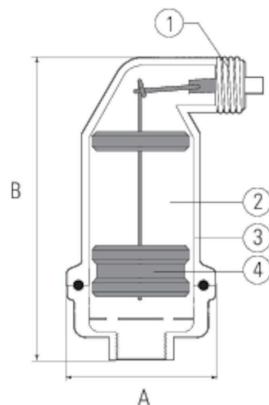

Measurements and weight

Dimension range (DN): 10 - 15

DN	A	B	C	Net weight (kg)
10	63	132	77.5	0.7
15	63	122	78	0.7

Function and design

The releasing valve has a high resistance to contamination and mainetenance costs can be mimized since large air bubbles are continuously removed both quickly and automatically.

When air enters the float body, the liquid level sinks and the float drops. When the float, that is connected to the separation mehcanism via a bar, reaches a certain level, the mechanism is affected and air can flow out in the free. When the float rises again, the mechanism closes.

The large volume of the air chamber and special design makes the liquid level never reach the drainage mechanism, even if the air in the chamber is compressed to 10 bar.

An automatic air vent diverts only free gas bubbles. Gas that is dissolved in the fluid, due to high pressure and/or

low temperature, can not be diverted. Can suck air in case of negative pressure. It will be a problem when system pressure is incorrect. But has an advantage in decomposing the system.

Technical data

Main material: Brass

Included materials: Brass

Temperature (°C): 0 - 180

PN: 10

Connection: Internal thread ISO 228-1 (G, BSPP), External thread ISO 228-1 (G, BSPP)

ETIM classification: EC010117 - De-aerator (automatic)

Comment to colour: Brass untreated

Installation and maintenance


Mounted in high spots or elsewhere that air can occur. For the right feature the arrestor needs to be mounted vertical with the connection downwards. Must be installed in places where the arrestor is available for inspection and possible cleaning. For access without interference, the AT 3640 ball valve, with DN equal to the arrestor, is mounted as a shutdown.

The automatic air conditioner is basically maintenance free but should be checked and possibly cleaned periodically for safe operation.

The company's management system
is certified by DNV
ISO 9001 • ISO 14001

Get into the flow

Get into the flow with Armatec.



armatec

info@armatec.se | +46 31 89 01 00 | www.armatec.se