


Backflow preventer AT 1167-SS

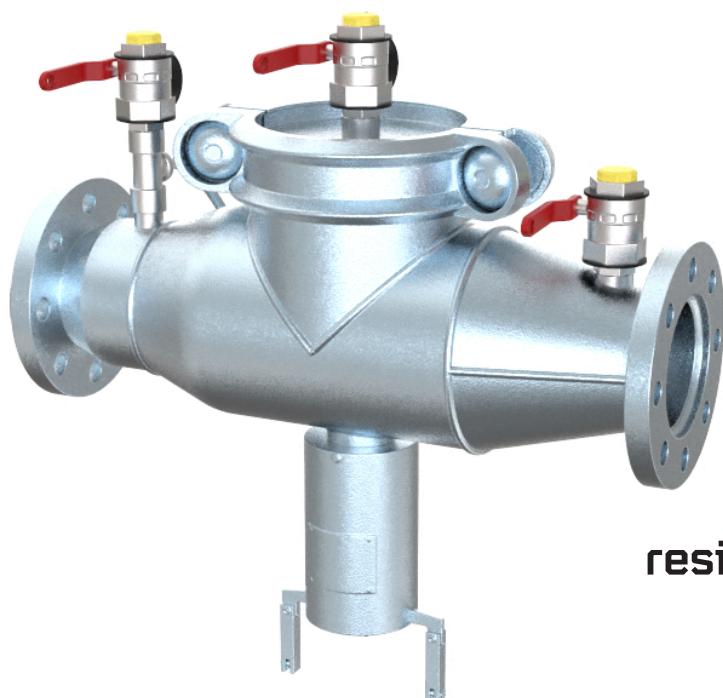

Product information

Stainless steel protective device type BA. Flanged connection for liquid category 4.

Dimension range (DN)	65 - 150
PN	10
Temperature (°C)	0 - 65
Main material	Stainless steel

Area of use

Backflow preventers are used to protect internal and external plumbing systems from backflow and pressure backflow. The protective cover is suitable for liquids up to category 4. The backflow preventer is of type BA in accordance with SS-EN 1717.

Tender text

PSG.26 Backflow preventers

Backflow prevention device AT 1167-...SS, DN.... Protective device made of stainless steel. PN10, Type BA in flanged design. For maximum protection coverage of liquid category 4 according to SS-EN 1717.

Quality assurance

Fluid category 4, SS-EN 1717

Fluid category 4, SS-EN 1717


The product is CE marked.

Product marking: Manufacturer, DN, PN, flow direction, manufacturer and manufacturing number. Separate inspection nameplate.

Energy and environment declaration

Reach date: 6/14/2023 12:00:00 AM

Pos	Component	Material
-----	-----------	----------



Measurements and weight

Dimension range (DN): 65 - 150

DN	A	B	C	D	E	Net weight (kg)
65	559	265	245	310	75	32
80	559	265	245	310	75	32.5
100	559	265	245	310	75	33
150	695	280	270	350	75	57

Function and design

Backflow preventer type BA covers the risks up to liquid category 4 when connecting to tap water, i.e. "Liquid that poses a health risk due to the presence of one or more toxic or highly toxic substances or one or more radioactive, mutagenic or carcinogenic substances".

The protective device has double check valves and an intermediate chamber with drainage. The protective devices work with three different pressure zones. The pressure in zone 1 is higher than in zone 2, which is higher than in zone 3. A drainage valve is connected in zone 2 and opens when the pressure difference between zone 1 and zone 2 drops to 0.14 bar. The water in zone 2 is drained to the atmosphere. This prevents siphonage or overpressure backflow into the system.

The backflow preventer must be installed as a complete protection module. It is an absolute requirement that the backflow preventer is installed as a protection module.

Technical data

Main material: Stainless steel

Main material code: Acid resistant stainless steel AISI 316Ti (1.4571)

Included materials: Stainless steel


Included material code: Acid resistant stainless steel AISI 316Ti (1.4571)

Temperature (°C): 0 - 65

PN: 10

Connection: Flanged EN1092

ETIM classification: EC004501 - Backflow preventer

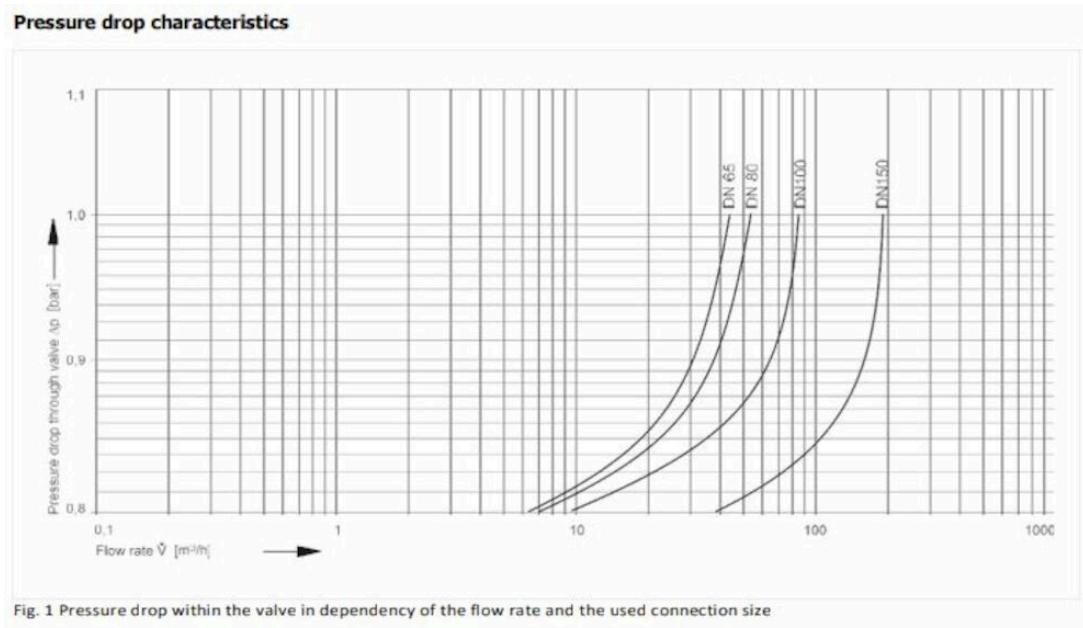

Installation and maintenance

Flowdirection: Uni-directional

Possible mounting position: Horizontal

Possible mounting position notes: "Shall be installed with drainage downwards."

In accordance with SS-EN1717:2025, which further refers to SS-EN 806-5, and with regard to maintenance, backflow protection/modules and other related fittings shall be checked, tested, and maintained in accordance with Annexes A, B, and C. Annex A describes the frequency, Annex B describes what is to be performed, and Annex C describes other equipment. This means for protection of type:

AB Inspection and maintenance every 6 months.

BA Inspection every 6 months and routine maintenance annually.

CA Inspection every 6 months and routine maintenance annually.

EA Inspection and routine maintenance annually.

To be carried out by qualified personnel. See user manual.

The company's management system
is certified by DNV
ISO 9001 • ISO 14001

Get into the flow

Get into the flow with Armatec.



armatec

info@armatec.se | +46 31 89 01 00 | www.armatec.se