

Knife Gate Valve AT 2201-



Product information

Shut-off valve for media with high fiber content or solid particles. With rising or non-rising spindle.

Dimension range (DN)	50 - 1200
PN	6 - 10
Temperature (°C)	0 - 120
Main material	Ductile iron

Area of use

Shut-off valve for media with high fiber content or solid particles. - Pulp - Pellets - Sludge - Recycled paper - Powder - Slurry - Backwater - Wastewater.

Tender text

PSB.3 Sliding gate valves

Quality assurance

AFS 2023:5, 8 paragraf, PED 2014/68/EU art 4.3

The product is CE marked

Product marking: Brand, DN, PN, material, flow direction, and seat marking.

Energy and environment declaration


Subject to notification under REACH: No

Reach date: 12/06/2026

Reach note: The product is not covered by REACH

List of details


Pos	Component	Material
1	Body	Cast iron GJL-250 (GG25)
2	Gate	Stainless steel AISI 304 (1.4301)
3	Seat	EPDM (ethylene propylene diene monomer rubber)
4	Packing	PTFE (polytetrafluoroethylene)

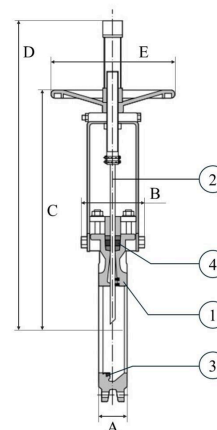

Measurements and weight

Dimension range (DN): 50 - 1200

DN	100
A	50
B	92
C	373
D	502
E	225
Net weight (kg)	11

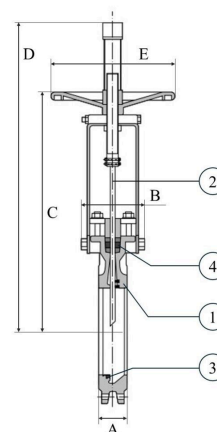

Function and design

Shut-off valve with handwheel, rising spindle. Full bore provides low pressure drop and minimizes the risk of clogging. Homogeneously cast valve body eliminates leakage to the atmosphere and prevents skewing of the damper. Tight packing box through gland design with PTFE-impregnated braid and extra O-ring. In-house cast guide blocks increase the blade's pressure against the soft seal when closed. Replaceable soft seal and packing box seal.

Technical data

Main material: Ductile iron

Main material code: Ductile iron GJS-500-7 (GGG50)

Included materials: Ductile iron, Stainless steel, Rubber, Other

Included material code: Ductile iron GJS-500-7 (GGG50), EPDM (ethylene propylene diene monomer rubber), PTFE (polytetrafluoroethylene), Stainless steel AISI 304 (1.4301)

Temperature (°C): 0 - 120

PN: 6 - 10

Connection: Flanged EN1092

ETIM classification: EC011462 - Knife gate valve

BK04 code: 20709 Slide damper valves

Product colour: RAL 5015 - Sky blue

Installation and maintenance

Flowdirection: Uni-directional

Possible mounting position: Vertical

"Mounted between flanges."

The company's management system
is certified by DNV
ISO 9001 • ISO 14001

Get into the flow

Get into the flow with Armatec.



armatec

info@armatec.se | +46 31 89 01 00 | www.armatec.se