




armatec

Rørstandard

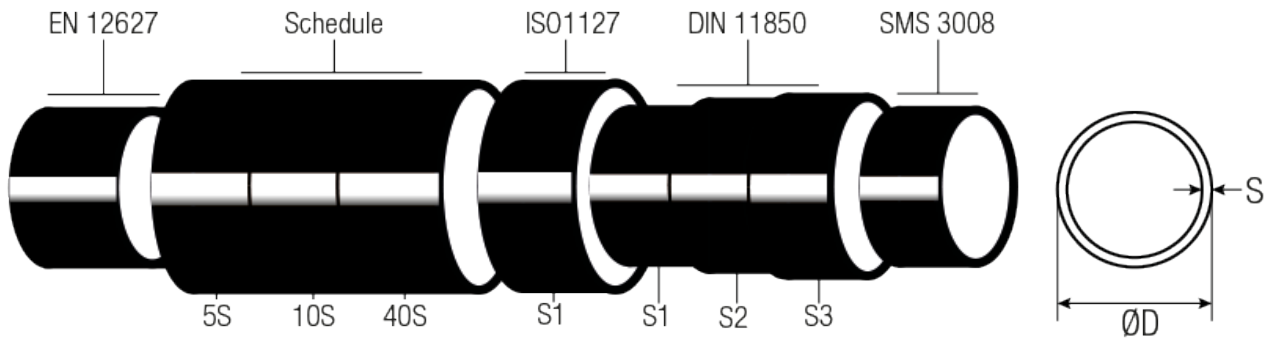

Example show size DN25

DN	EN12627		Schedule				ISO 1127		DIN 11850						SMS 3008	
				5S	10S	40S	Serie 1		Serie 1		Serie 2		Serie 3			
	D	S	D	S	S	S	D	S	D	S	D	S	D	S	D	S
8	14,0	1,25	13,7	-	1,65	2,24	13,5	1,6	-	-	-	-	-	-	-	-
10	17,2	2,30	17,2	-	1,65	2,31	17,2	1,6	12,0	1,0	13,0	1,5	14,0	2,0	12,0	1,0
15	21,7	3,35	21,3	1,65	2,11	2,77	21,3	1,6	18,0	1,0	19,0	1,5	20,0	2,0	18,0	1,0
20	27,2	3,35	26,7	1,65	2,11	2,87	26,9	1,6	22,0	1,0	23,0	1,5	24,0	2,0	25,0	1,2
25	34,0	4,015	33,4	1,65	2,77	3,38	33,7	2,0	28,0	1,0	29,0	1,5	30,0	2,0	32,0	1,2
32	42,7	4,15	42,2	1,65	2,77	3,56	42,4	2,0	34,0	1,0	35,0	1,5	36,0	2,0	33,7	1,2
40	48,6	4,15	48,3	1,65	2,77	3,68	48,3	2,0	40,0	1,0	41,0	1,5	42,0	2,0	38,0	1,2
50	60,5	4,60	60,3	1,65	2,77	3,91	60,3	2,6	52,0	1,0	53,0	1,5	54,0	2,0	51,0	1,2
65	76,3	4,60	73,0	2,11	3,05	5,16	76,1	2,6	70,0	2,0	70,0	2,0	-	-	63,5	1,6
80	88,9	4,45	88,9	2,11	3,05	5,49	88,9	2,6	85,0	2,0	85,0	2,0	-	-	76,1	1,8
100	116,0	6,45	114,3	2,11	3,05	6,05	114,3	2,6	104,0	2,0	104,0	2,0	-	-	101,6	2,0
125			141,3	2,77	3,40	6,55	139,7	2,6			129,0	2,0				
150			168,3	2,77	3,40	7,11	168,3	2,6			154,0	2,0				
200			219,1	2,77	3,76	8,18	219,1	2,9			204,0	2,0				
250			273,0	3,40	4,19	9,27	273,0	2,9								
300			323,8	3,96	4,57	9,53	323,9	2,9								

D = Outer diameter

S = Thickness